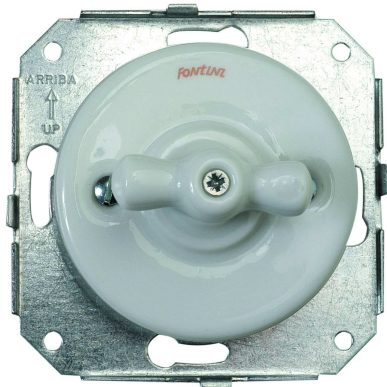


TECHNICAL FILE:**Switches****1.- Technical specifications**

Rated voltage: 250 V ~

Rated current: 10 AX

Protection degree: IP20

Manufactured according to EN 60.669-1

Flush mounting in universal box according EN-60-670 standard

Screwless terminals (accepts from 1 mm² to 2.5 mm² cross section cable)

2.- Material characteristics


Main body: Polyamide 66 (PA66)

Glow wire test: 850 °C



Terminals: CuZn33

3.- Certifications

Certificates AENOR N°030/001747 , LCIE N° 60044095B y VDE N°400369900

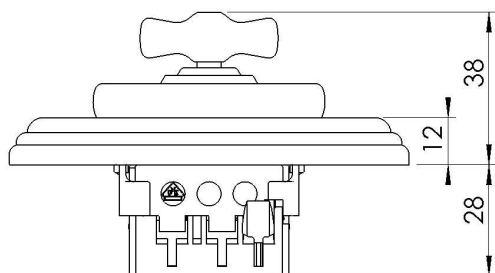Height dimensions (size in mm)

Installation diagram

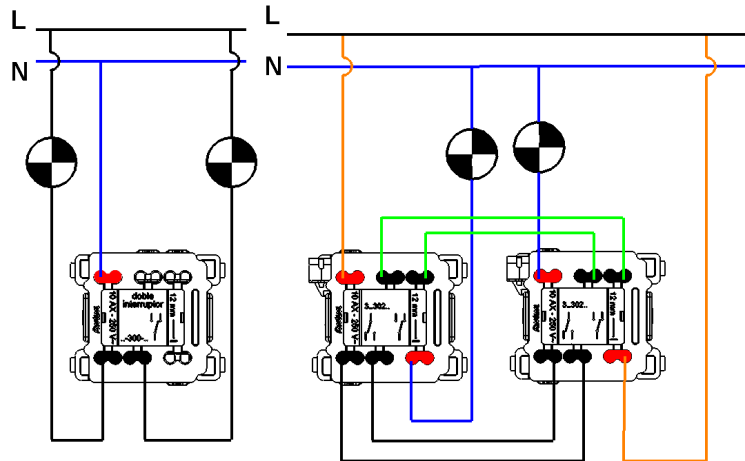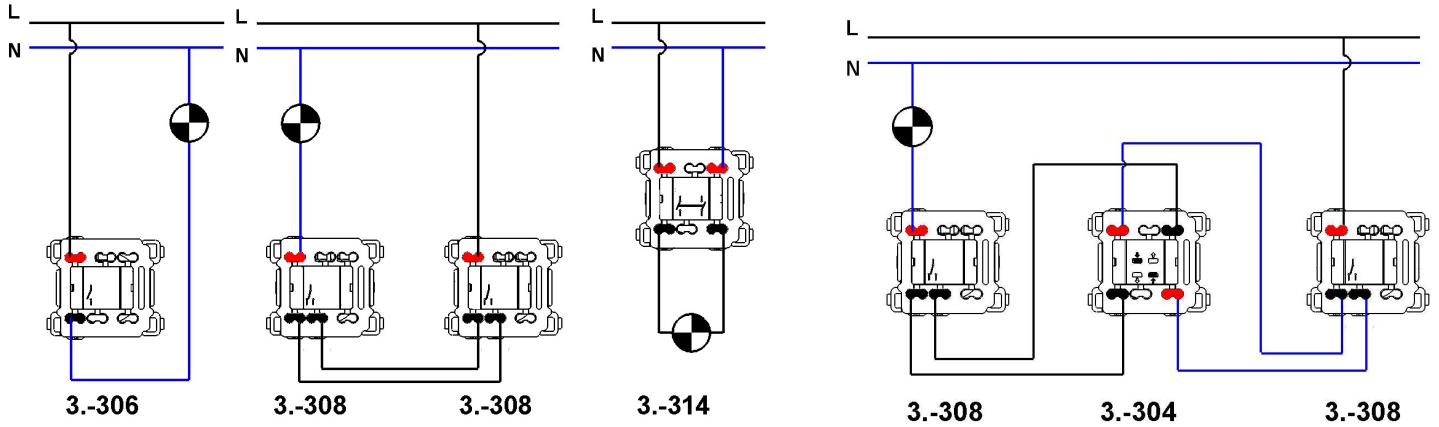

Doble Interruptor
Double switch
Double Interrupteur

Doble Conmutador
Double Two-way switch
Double Va-et-vient

Doble Conmutador
Double Two-way switch
Double Va-et-vient