

TECHNICAL FILE:

Switches



1.- Technical specifications

Rated voltage: 250 V ~

Rated current: 10 AX

Protection degree: IP20

Manufactured according IEC 60.669-1 standard

Surface mounting on wall and universal box according EN-60.670 standard

Screwless terminals (accepts from 1 mm² to 2.5 mm² cross section cable)



2.- Material characteristics

Body: Polyamide 66

Glow wire test: 850 °C

Terminals: Brass CuZn33

External body: Porcelain


Knob: Porcelain, wood and brass

Frame: Beech wood




Dimensions (size in mm)


Installation on wall

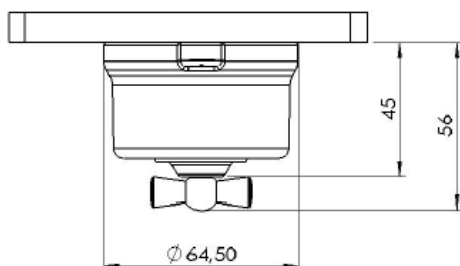

With Garby frame

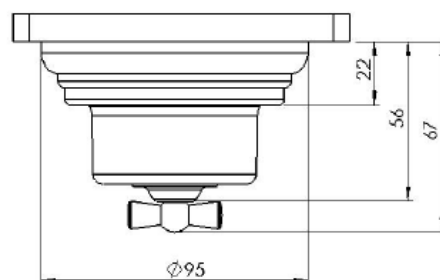


With Garby Colonial frame

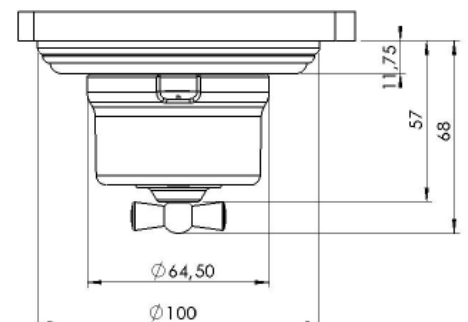


Garby Collection

INSTALLATION INSTRUCTIONS


Garby frame on universal flush box installation

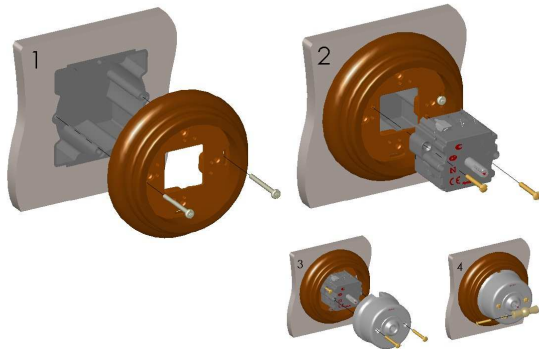


Venezia frame on universal box installation

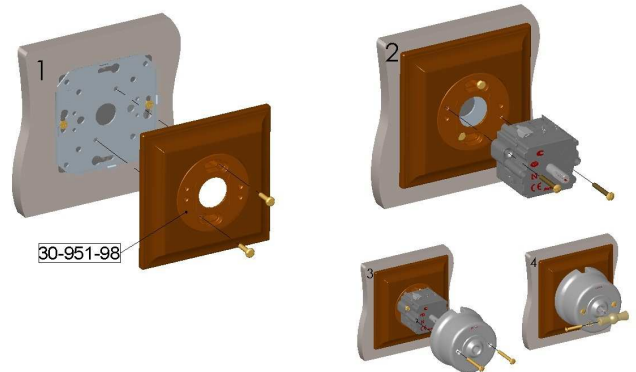


Garby frame on round box without screws

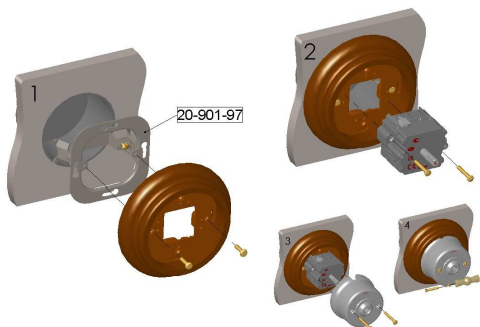


Garby frame directly on wall installation

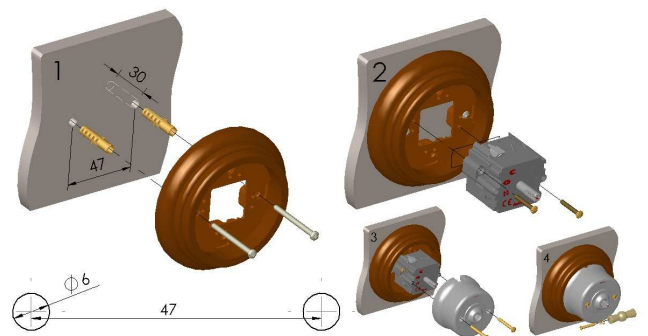

Venezia frame directly on wall installation

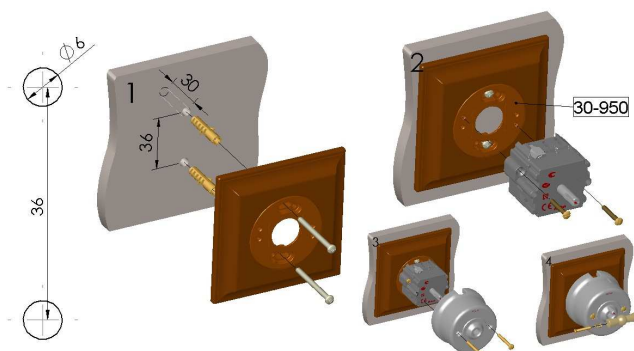

Without frame directly on wall

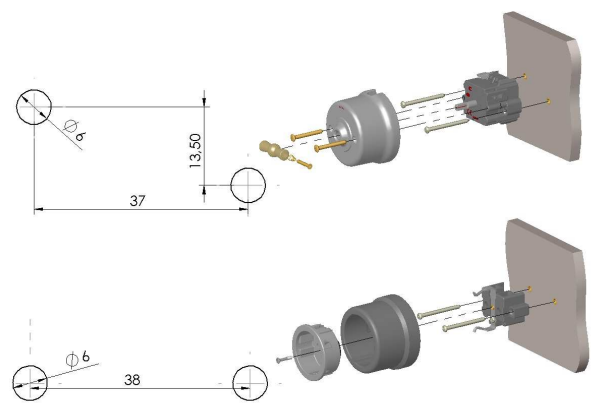

Garby Collection

Installation diagram

