


TECHNICAL FILE:

Pushbutton

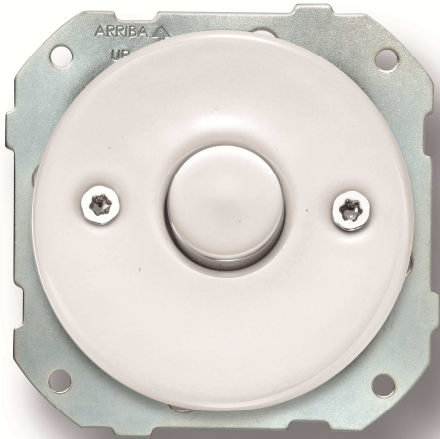

1.- Technical specifications

Rated voltage/current: 230 V ~ 10AX or 24 VDC

Manufactured according EN 60.669-1 standard

Flush mounting in universal box according EN-60.670 standard

Screw terminals (accepts from 1 mm² to 2.5 mm² cross section cable)

2.- Material characteristics

Body: Polycarbonate (PC)

Glow wire test: 850 °C

Terminals: Brass CuZn33

Screws: Steel CQ15. Slotted Phillips pan head. Metric thread M3.5

Button: Brass (chrome, polished copper and dark nickel)

External body: Porcelain

3.- Certificate approvals

CE certificate

Dimensions (si:

